

Features

- 2-channel isolated barrier
- 24 V DC supply (bus powered)
- 2-wire SMART transmitters or current sources
- Usable as signal splitter (1 input and 2 outputs)
- Dual output 4 mA ... 20 mA or 1 V ... 5 V
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC 61508

Function


This isolated barrier is used for intrinsic safety applications. It provides a fully floating supply to power 2-wire SMART transmitters in the hazardous area, and repeats the current to drive a safe area load. It is also used with 2-wire current sources.

Digital signals may be superimposed on the analog values in the hazardous or safe area, which are transferred bi-directionally.

A separate fault output on the bus is signaled if the input signal is outside the range 0.2 mA ... 24 mA. The fault conditions can be monitored via a Fault Indication Board.

This module mounts on a HiD Termination Board.

Assembly

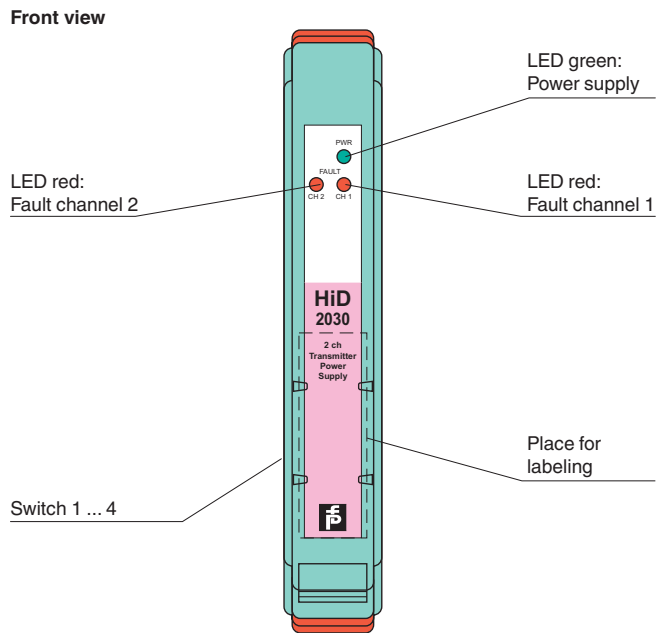

Application


The device supports the following SMART protocols:

- HART
- BRAIN
- Bailey (only STT02 communication, e. g. BCN series)
- Foxboro



SIL 2

Connection

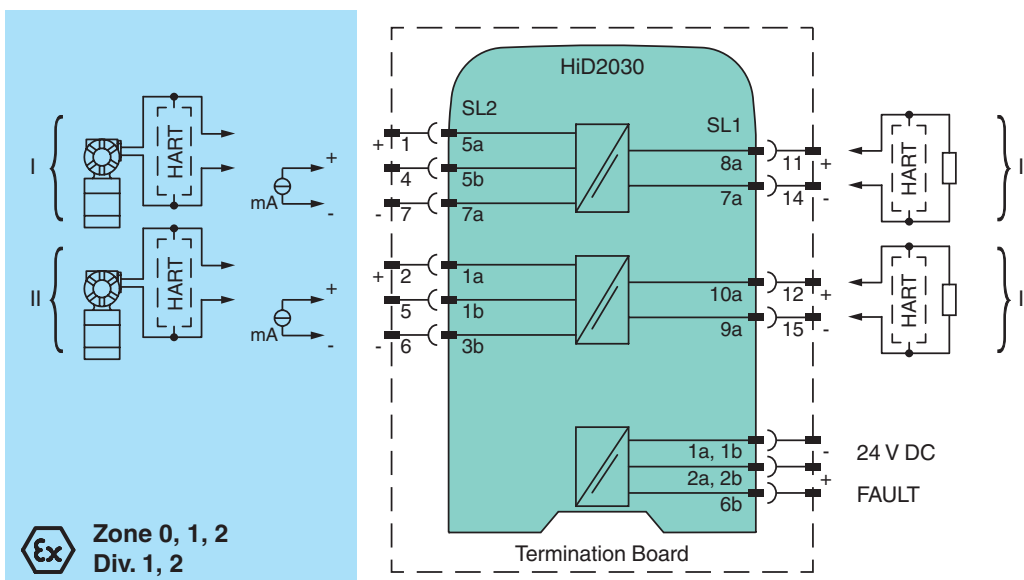

Release date 2017-08-09 14:51 Date of issue 2017-08-10 12:1495_eng.xml


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications	
Signal type	Analog input
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Supply	
Connection	SL1: 1a(-), 1b(-); 2a(+), 2b(+)
Rated voltage U_r	20.4 ... 30 V DC bus powered via Termination Board
Rated current I_r	60 mA at 24 V, 20 mA output (per channel)
Power dissipation	1.05 W at 24 V (per channel)
Input	
Connection side	field side
Connection	SL2: 5a(+), 5b, 7a(-); 1a(+), 1b, 3b(-)
Input current	4 ... 20 mA , current limit 26 mA typ.
Input resistance	40 Ω , for current source
Ripple	10 mV _{eff}
Voltage	min. 15.5 V at 20 mA
Communication	pass-through of HART signal to safe area The current sink terminals 4, 7 and 5, 6 do not pass the HART signal to safe area.
Output	
Connection side	control side
Connection	SL1: 8a(+), 7a(-); 10a(+), 9a(-)
Load	0 ... 650 Ω
Output signal	4 ... 20 mA or 1 ... 5 V (on 250 Ω , 0.1 % internal shunt)
Ripple	10 mV _{eff} on a load of 250 Ω
Response time	70 ms , 10 ... 90 % step change
Signal level	no fault: 1 mA ... 23.5 mA input current fault detection: < 0.2 mA or > 24 mA input current
Fault indication output	
Connection	SL1: 6b
Output type	open collector transistor (common to both channels) fault bus signal, collective error message
Transfer characteristics	
Calibrated accuracy	< \pm 0.1 % of full-scale value (current output)
Influence of temperature	< \pm 0.01 %/ K
Frequency range	communication channel: 0.5 ... 40 kHz within 3 db, (-6 db at 100 kHz), Tx to output and output to Tx, suitable for use with SMART transmitters using HART or similar protocol
Influence of load	< \pm 0.1 % of full-scale value from 0 ... 650 Ω
Linearity	< \pm 0.05 % of full-scale value
Galvanic isolation	
Output/power supply	functional insulation acc. to DIN EN 50178, rated insulation voltage 50 V _{eff}
Output/Output	functional insulation acc. to DIN EN 50178, rated insulation voltage 50 V _{eff}
Indicators/settings	
Display elements	LEDs
Control elements	DIP-switch
Configuration	via DIP switches
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2006 For further information see system description.
Degree of protection	IEC 60529
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	5 ... 90 % , non-condensing up to 35 °C (95 °F)
Mechanical specifications	
Degree of protection	IP20
Mass	approx. 140 g
Dimensions	18 x 106 x 128 mm (0.7 x 4.2 x 5 inch)
Mounting	on Termination Board
Coding	pin 1 and 3 trimmed For further information see system description.
Data for application in connection with hazardous areas	
EU-Type Examination Certificate	CESI 02 ATEX 086

Release date 2017-08-09 14:51 Date of issue 2017-08-10 12:495_eng.xml

Marking		⊕ II (1)G [Ex ia Ga] IIC , ⊕ II (1)D [Ex ia Da] IIIC
Input		Ex ia, Ex iaD
Voltage	U _o	26 V
Current	I _o	93 mA
Power	P _o	605 mW
Supply		
Maximum safe voltage	U _m	250 V AC (Attention! U _m is no rated voltage.)
Certificate		PF 11 CERT 2109 X
Marking		⊕ II 3G Ex nA IIC T4 Gc [device in zone 2]
Galvanic isolation		
Input/input		safe electrical isolation acc. to EN 60079-11:2007, voltage peak value 60 V
Input/Output		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
CSA approval		
Control drawing		366-005CS-12B (cCSAus)
IECEX approval		IECEX TUN 04.0012
Approved for		[Ex ia] IIC
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Configuration

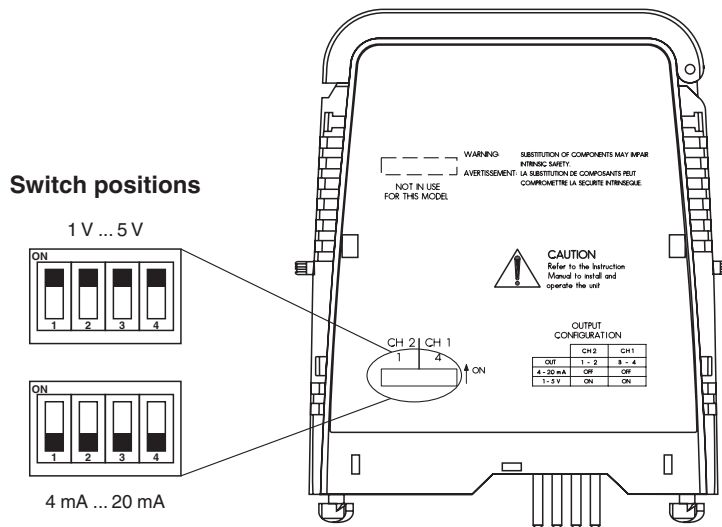

The outputs can be configured as:

- Current output 4 mA ... 20 mA
- Voltage output 1 V ... 5 V

Output	CH 1		CH 2 (only for HiD2030)	
	SW4	SW3	SW2	SW1
4 mA ... 20 mA	OFF	OFF	OFF	OFF
1 V ... 5 V	ON	ON	ON	ON



Channel 2 only for HiD2030.


Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.



The pins for this device are trimmed to polarize it according to its safety parameter. Do not change! For further information see system description.

Connection for signal splitter function: 1 input → 2 outputs

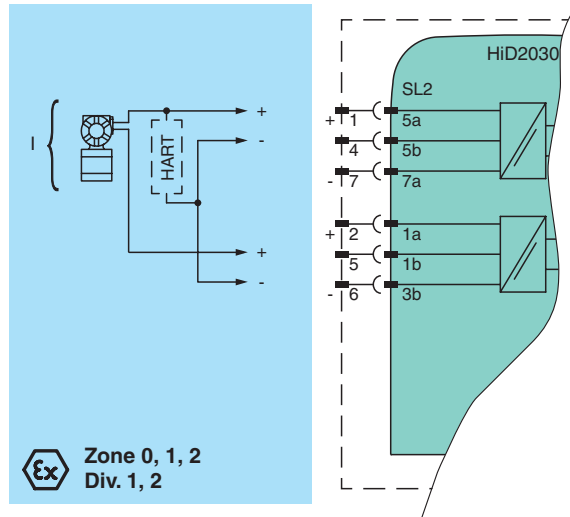

Note:

- Communication for SMART transmitter is provided only on output channel 1.
- Minimum supply voltage available for field transmitters is 14.7 V at 20 mA.
- Safety parameters are now:
 - $U_o = 27.2 \text{ V}$
 - $I_o = 93 \text{ mA}$
 - $P_o = 633 \text{ mW}$
- See operating instructions for other connection options and for more details.