


N96 X44

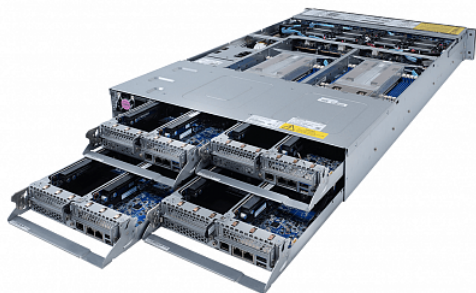

- ✓ AMD EPYC 7002
- ✓
- ✓ PCIe 4-
- ✓

vmware®

	2 AMD EPYC 7002, 225W (cTDP 240). 280W.
	2048GB ECC DDR4, 16 L-/R-DIMM 3200
	- - AMD EPYC 700x
	Aspeed® AST2500
	4
	2x PCIe x16 (Gen4 x16)
	1x OCP 3.0 mezzanine PCIe Gen4 x16
	2x 1GbE LAN (1x Intel® I350-AM2)
	1x
	2x 2.5" NVMe/SATA SSD
	1x M.2 NGFF-2280/22110 PCIe Gen4 x4/SATA
	Aspeed® AST2500

	<ul style="list-style-type: none"> Aspeed® AST2500: - - JAVA SOL - HTML5 KVM - (Voltage, RPM, Temperature, CPU Status) - - FRU - SEL / Circular Storage Policy - - - Firewall - - - LDAP / AD / RADIUS - - BIOS/BMC/CPLD - - - - SSL / SMTP
	<ul style="list-style-type: none"> 2 x 2200W 1+1 80 PLUS Platinum
	2 x 80x80x38
(x x),	300 779 1180
	<ul style="list-style-type: none"> Windows Server 2016 Windows Server 2019 Red Hat Enterprise Linux 7.6 (x64) Red Hat Enterprise Linux 8.0 (x64) SUSE Linux Enterprise Server 12 SP4 (x64) SUSE Linux Enterprise Server 15 SP1 (x64) Ubuntu 16.04.6 LTS (x64) Ubuntu 18.04.3 LTS (x64) Ubuntu 20.04 LTS (x64) VMware ESXi 6.5 EP15 VMware ESXi 6.7 Update3 VMware ESXi 7.0 Citrix Hypervisor 8.1.0
	50