


2-Channel Digital Input Module 220 VDC

for eXTReme environmental conditions; 2- to 4-wire connection; high-side switching

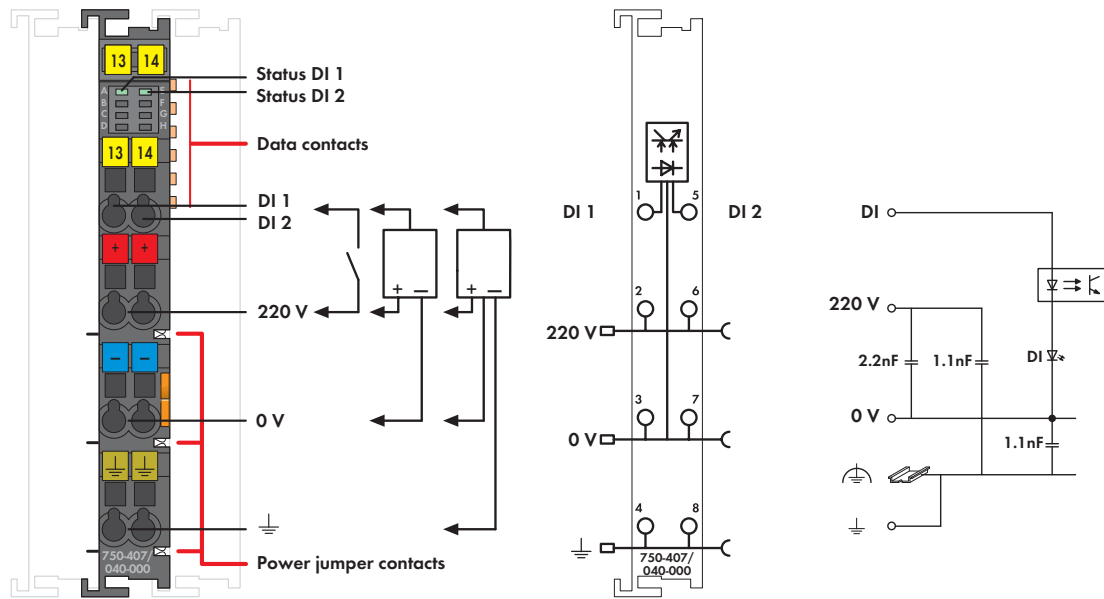

This digital input module receives control signals from digital field devices (e.g., sensors). The module is a 4-conductor device allowing direct connection of sensors with ground contact. Each input module has a 3.0 ms noise-rejection filter. Field and system levels are electrically isolated. When using the ground CAGE CLAMP® connection, the field power must be reapplied after every seven 750-407/040-000 I/O modules!

The module is ideally suited for operation in harsh environmental conditions:

- extended temperature range
- higher dielectric strength and EMC resistance
- higher vibration and shock resistance

Description	Item No.	Pack. Unit
2DI 220VDC 3.0ms /XTR	750-407/040-000	1
Accessories		
Miniature WSB Quick marking system		
plain	248-501	5
with marking	see Section 11	
Approvals		
Conformity marking	CE	
Korea Certification	KC	
Marine applications	GL, LR	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
TÜV 17 ATEX 193969 X	II 3G Ex ec IIC T4 Gc	
IEEx TUN 16.0046 X	Ex ec IIC T4 Gc	
Technical Data		
Wire connection	CAGE CLAMP®	
Cross sections	0.25 mm ² ... 2.5 mm ² / AWG 24 ... 14	
Strip lengths	8 ... 9 mm / 0.33 in	
Dimensions (mm) W x H x L	12 x 62 x 100	
Weight	48 g	
Operating temperature	-40 °C ... +70 °C	
Storage temperature	-40 °C ... +85 °C	
Relative humidity	Max. 95 % short-term condensation per Class 3K7/IEC EN 60721-3-3 and E DIN 40046-721-3 (except wind-driven precipitation, water and ice formation)	
Operating altitude	without temperature derating: 0 m ... 2000 m; with temperature derating: 2000 m ... 5000 m (0.5 K/100 m); max.: 5000 m	

Technical Data	
Number of inputs	2
Signal voltage (0)	-3 V ... +100 VDC
Signal voltage (1)	160 V ... 286 VDC
Voltage via power jumper contacts	220 VDC (-20 % ... +25 %)
Input current (typ.)	1.2 mA at 220 VDC
Input filter	3.0 ms
Current consumption (internal)	5 mA
Current via power jumper contacts (max.)	10 A (operating temperature < 60 °C); 8 A (60 °C ... 70 °C operating temperature)
Rated surge voltage	5.0 kV (EN 60870-2-1 / Class VV3); 4.0 kV (UL 508); 4.0 kV (EN 60664-1 / up to 4,000 m above sea level); 2.5 kV (EN 60664-1 / > 4,000 m up to 5,000 m above sea level)
Overvoltage category	Nominal voltage 220 V: III (EN 60664-1 / up to 4,000 m above sea level); II (EN 60664-1 / > 4,000 m up to 5,000 m above sea level)
Degree of pollution	2 (EN 60664-1)
Bit width	2 bits
Vibration resistance	acc. to IEC 60068-2-6 (acceleration: 5g), EN 60870-2-2, IEC 60721-3-1, -3, EN 50155, EN 61373
Shock resistance	acc. to IEC 60068-2-27 (15g/11 ms/half-sine/1000 shocks; 25g/6 ms/1000 shocks), EN 50155, EN 61373
EMC immunity of interference	acc. to EN 61000-6-1, -2, EN 61131-2, marine applications, EN 50121-3-2, -4, -5, EN 60255-26, EN 60870-2-1, EN 61850-3, IEC 61000-6-5, IEEE 1613, VDEW: 1994
EMC emission of interference	acc. to EN 61000-6-3, -4, EN 61131-2, EN 60870-2-1, EN 61850-3, EN 50121-3-2, -4, -5