

4-Channel Digital Input Module 24 V DC

2-conductor connection; high-side switching

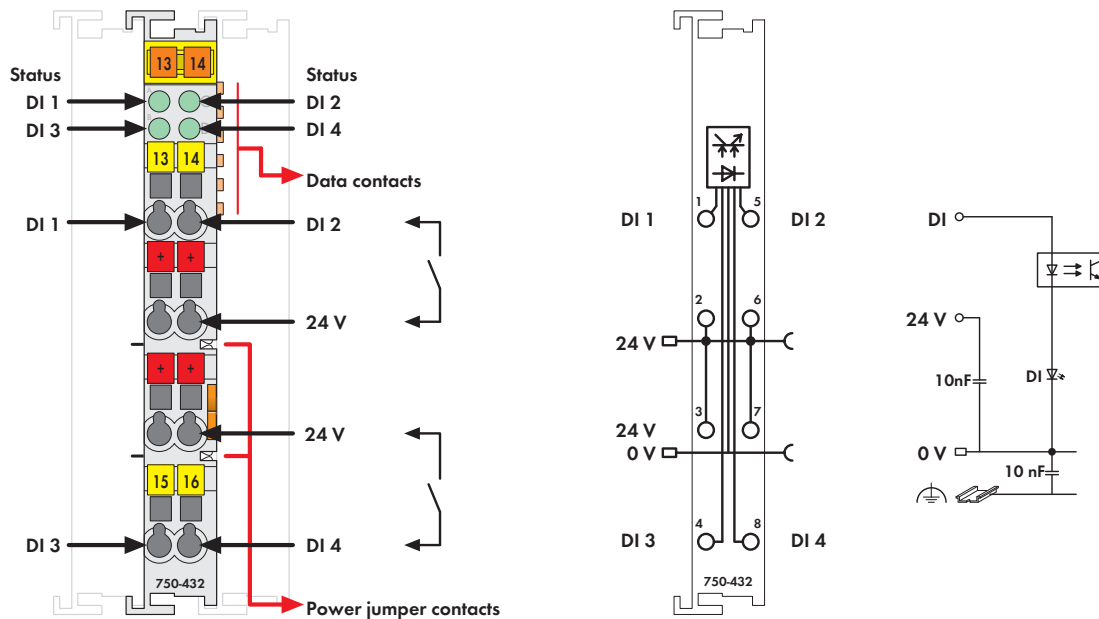









Fig. 750 Series
Delivered without miniature WSB markers

The digital input module receives control signal from the digital field devices (sensors, etc.).

The module is a 4-input channel, 2-conductor device. Due to its four 24V connections, four sensors may be directly connected to it.

Each input module has a noise-rejection filter. This filter is available with different time constants.

Field and system levels are electrically isolated.

Description	Item No.	Pack. Unit
4DI 24V DC 3.0ms/2-conductor	750-432	1
4DI 24V DC 0.2ms/2-conductor	750-433	1
4DI 24V DC 3.0ms/2-conductor (without connector)	753-432	1
4DI 24V DC 0.2ms/2-conductor (without connector)	753-433	1
Accessories	Item No.	Pack. Unit
 753 Series Connectors	753-110	25
 Coding elements	753-150	100
 Miniature WSB Quick marking system		
plain	248-501	5
with marking	see Section 11	
Approvals		
Conformity marking	CE	
Korea Certification		
Marine applications	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA	
 UL 508		
 ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
 TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc	
IECEx TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc	

Technical Data	
Number of inputs	4
Current consumption (internal)	5.5 mA
Voltage via power jumper contacts	24 V DC (-25 % ... +30 %)
Signal voltage (0)	-3 V ... +5 V DC
Signal voltage (1)	15 V ... 30 V DC
Input filter	3.0 ms (750-432 / 753-432) 0.2 ms (750-433 / 753-433)
Input current (typ.)	4.5 mA
Isolation	500 V system/supply
Internal bit width	4 bits in
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Strip lengths, 750/753 Series	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	48.5 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-3, marine applications