

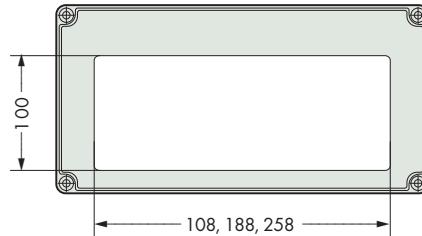


# Polyester system housing

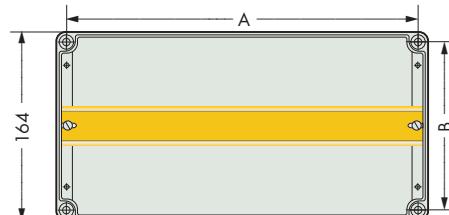

Polyester system housing

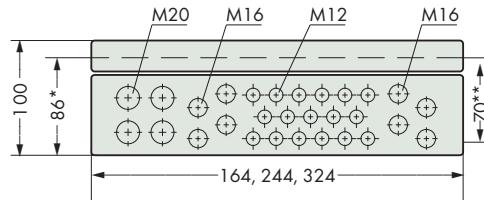

Dimensions in mm  
 \* internal dimension  
 \*\* from upper-edge of DIN 35 rail

Item description	POL Enclosure		
Version	RAL7032 164mm CG11	RAL7032 244mm CG7	RAL7032 324mm CG10
Item no.	850-834	850-835	850-836

## Technical Data

Number of M12 screw connections	9	14	17
Number of M16 screw connections	-	4	8
Number of M20 screw connections		4	
Mounting dimension A x B	142 x 142 mm	222 x 142 mm	302 x 142 mm
Dimensions W x H x D	164 x 100 x 164 mm	244 x 100 x 164 mm	324 x 100 x 164 mm
No. of I/O modules	≤ 4*	≤ 11*	≤ 18*
Data sheet and further information, see:	<a href="http://wago.com/850-834">wago.com/850-834</a>	<a href="http://wago.com/850-835">wago.com/850-835</a>	<a href="http://wago.com/850-836">wago.com/850-836</a>

## Accessories

Accessories	Item no.
Pole mounting	850-903

\*The „number of I/O modules“ also takes fieldbus couplers and bus end modules into account.  
 This applies to 12mm-wide I/O modules. I/O modules with a width of 24mm count as two I/O modules.

## Included:

- Polyester enclosure, glass fiber-reinforced, halogen-free, as V0 version (self-extinguishing)
- Polyamide cover screws, captive
- Inspection glass, incl. attachment panel for customer marking (marking not included in scope of supply)
- Mounting holes (4 mounting channels located outside the sealed enclosure)
- Metric cable grips (polyamide PA 6), incl. filler plugs;  
 M12 cable grip, 3–6 mm cable diameter;  
 M16 cable grip, 5–9 mm cable diameter;  
 M20 cable grip, 9–13 mm cable diameter
- 1 x DIN 35/7.5 rail
- Oil and petroleum-resistant neoprene round chord seal
- Pebble gray, RAL 7032